



PHASE 3 - FBMesh Overlapping

(scale 1:25)



FRONT VIEW
V1-V1

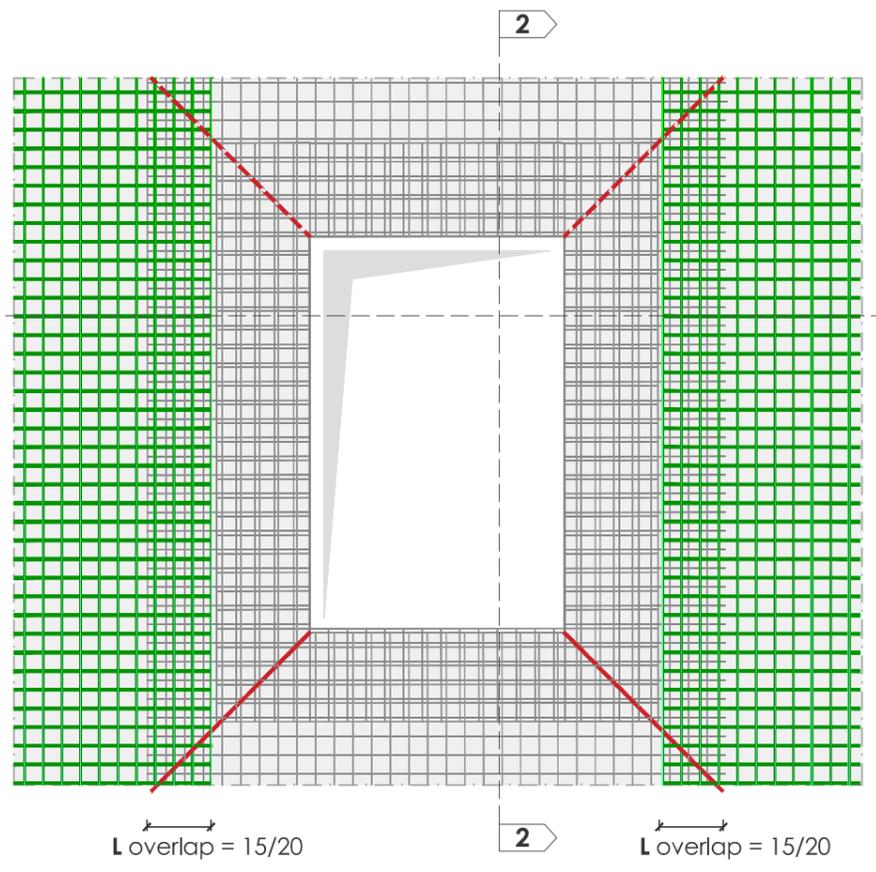

SIDE VIEW
V2-V2

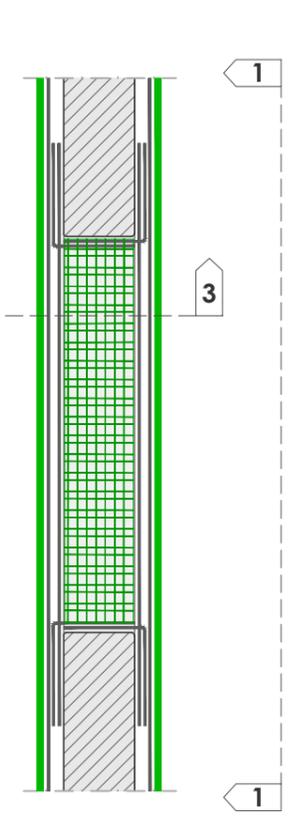

BOTTOM-UP VIEW
V3-V3

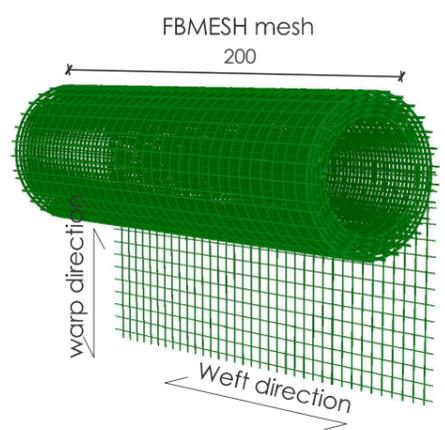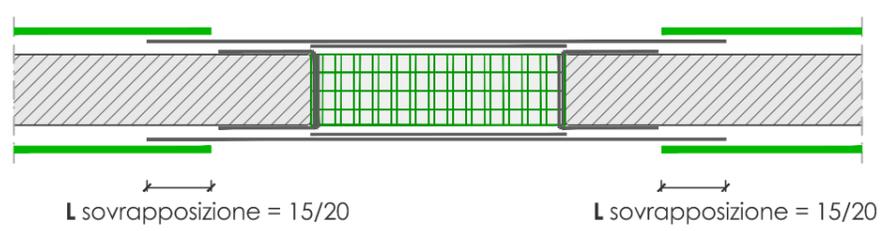


PHASE 3: Placement of **FBMesh** mesh on the median plane of the plaster in all remaining areas of the wall, overlapping for a distance of 15-20cm corresponding to the mesh laid in Phase 2 on all openings.


PHASE 4 - Drilling of the holes

(scale 1:25)


FRONT VIEW
V1-V1

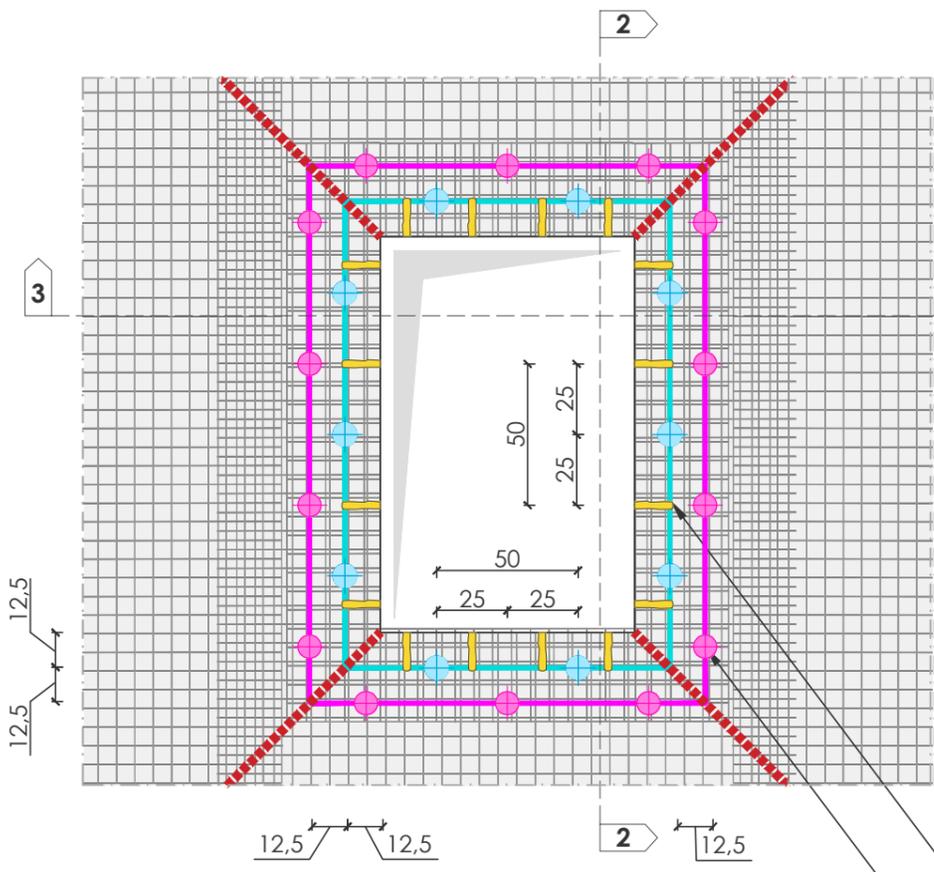

SIDE VIEW
V2-V2

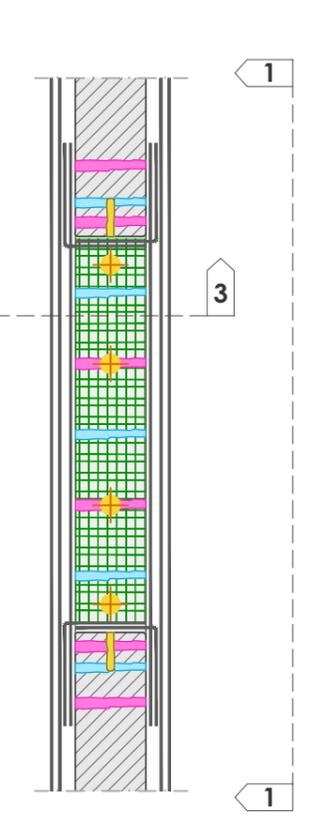

BOTTOM-UP VIEW
V3-V3

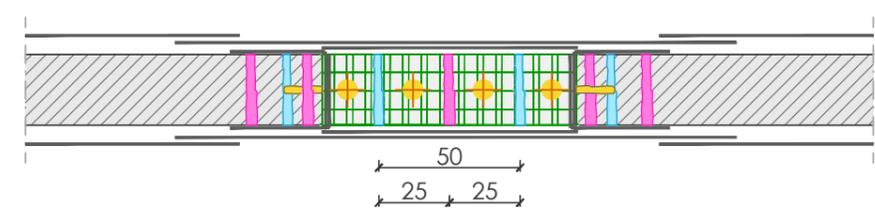

PHASE 4: Drilling of holes for the installation of connectors and subsequent realization of the same. The holes will be placed around the perimeter of the opening according to two tracks respectively at a distance of 12.5cm and 25cm from the corners of the opening. The connectors will have a spacing of 50cm along the tracks and the arrangement should be staggered between the two. Similarly, the holes for the connectors should also be made on the shoulders, thresholds, and lintel, and will be aligned with the wall.

NOTE: Avoid drilling holes at the locations of the fissure lines.

The measurements are expressed in centimeters unless otherwise specified.
For the connector layout diagram and materials table, refer to table CRM10

