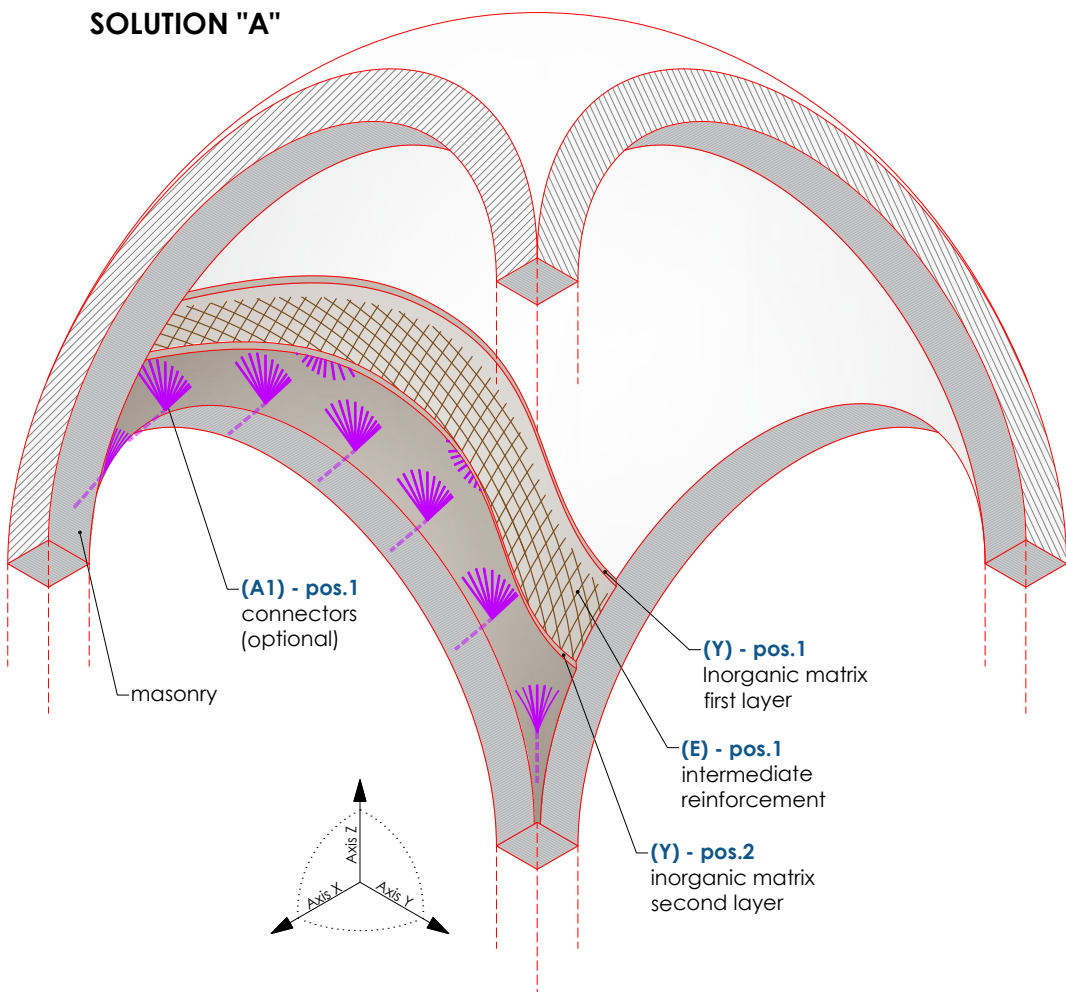
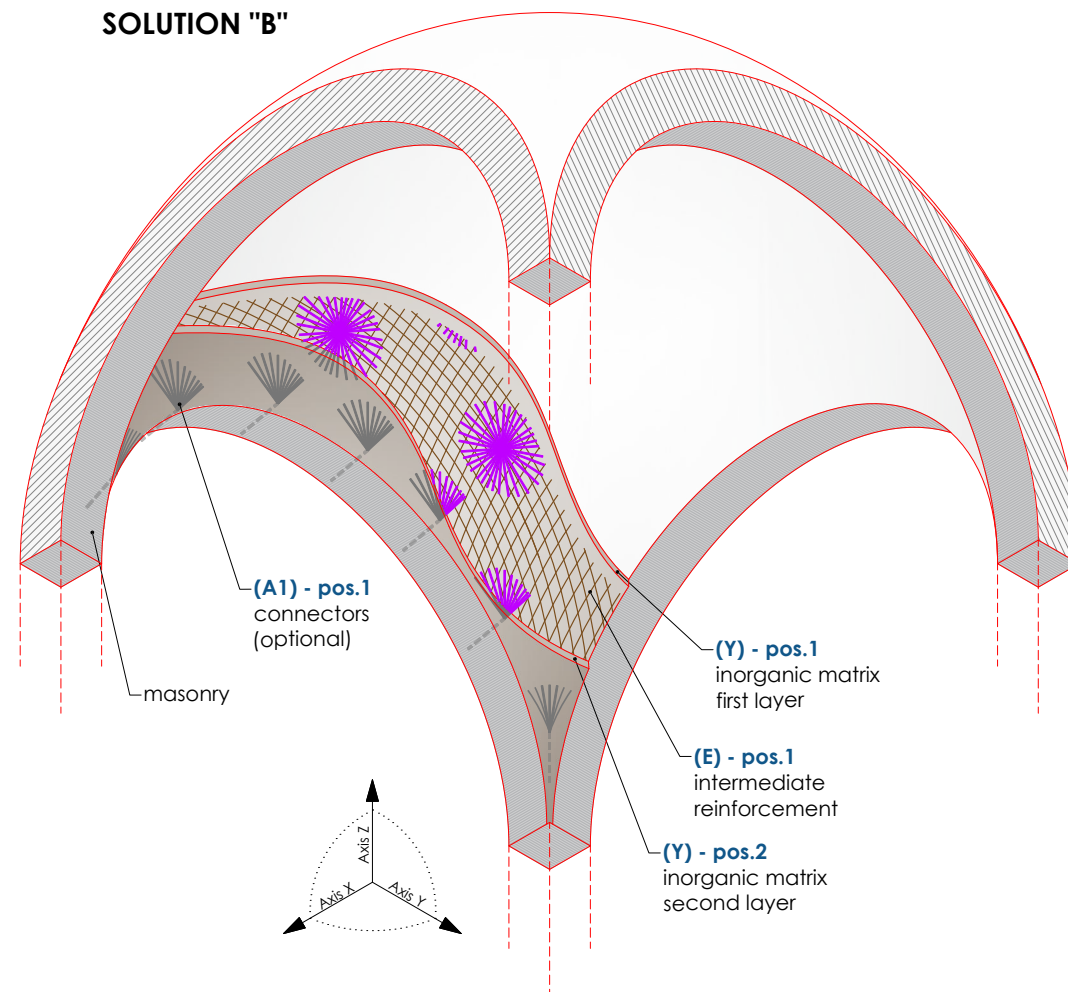
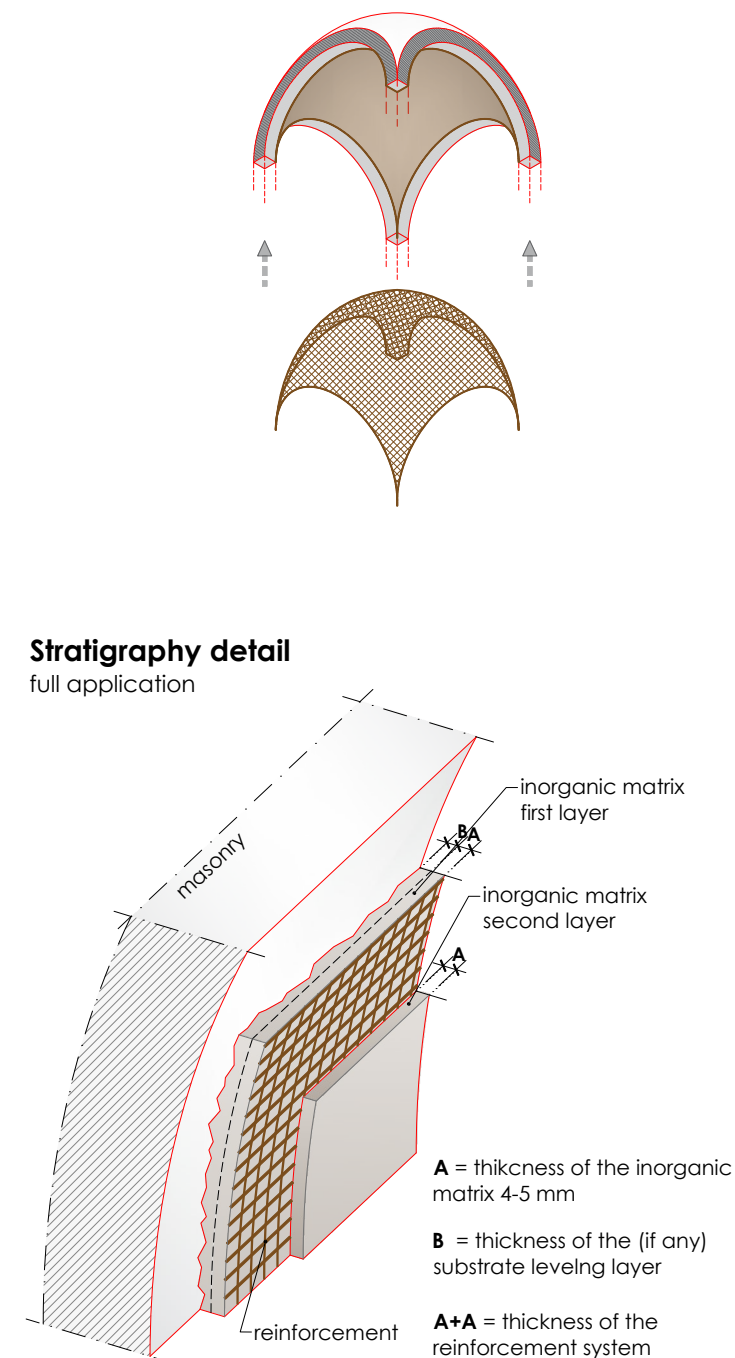


AXONOMETRIC VIEW
SOLUTION "A"AXONOMETRIC VIEW
SOLUTION "B"Stratigraphy detail
full application

NOTE: the first layer of inorganic matrix may include the thickness required for substrate leveling

MATERIAL IDENTIFICATION - C-MATRIX system

(Y) INORGANIC MATRIX

(E) REINFORCEMENT


(A1) FB-TUP10-....(bowed bars)

(P3) FB-....INTEGRA FIXA-.... (Anchoring resin)

Dimensions are in mm unless otherwise specified
For the materials table, refer to drawing FRCM08.

Detail SOLUTION "A" - Debossed connectors above the second layer of inorganic matrix

The layout, grouting, and debowing of the connectors must be carried out only after the application of the second layer of inorganic matrix, once the mortar has fully hardened.

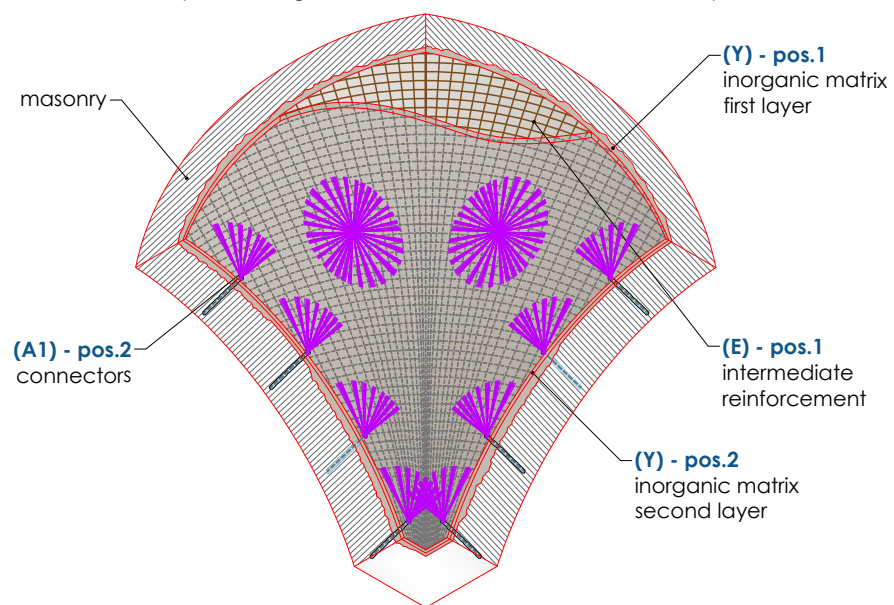

Detail SOLUTION "B" - Debossed connectors above the reinforcement

The layout and grouting of the connectors must be carried out after Phase 0 of substrate preparation, while the debowing is performed only after the reinforcement has been applied.

