



PHASE 3 - FB MESH overlap

(scale 1:25)



FRONT VIEW  
V1-V1

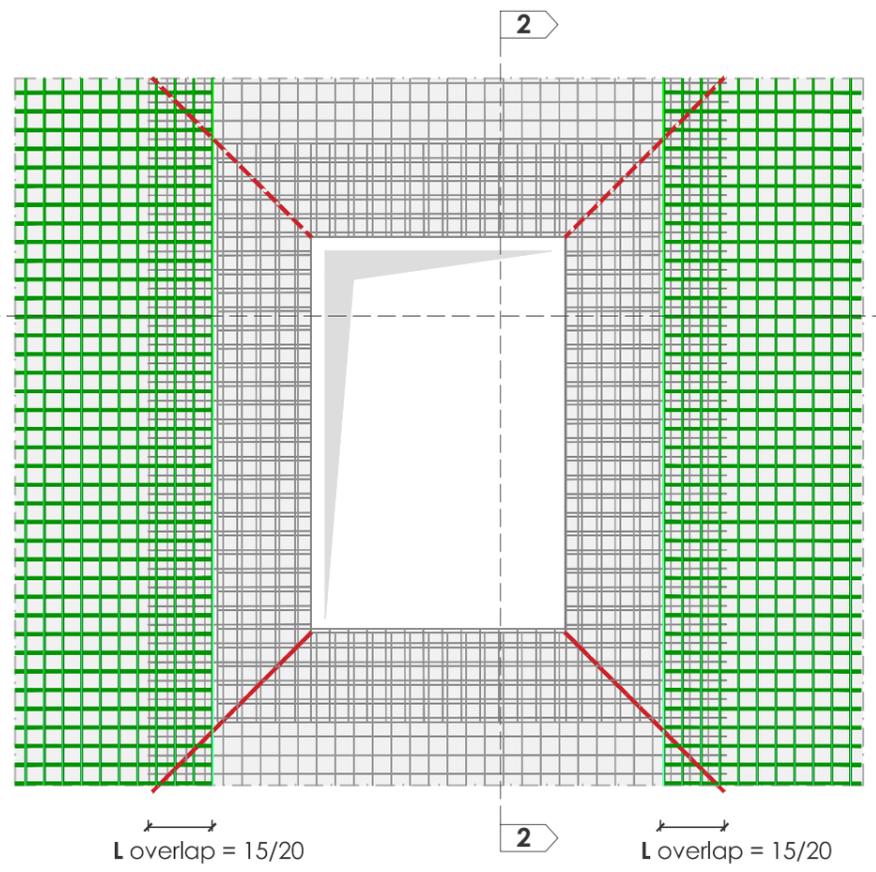

SIDE VIEW  
V2-V2

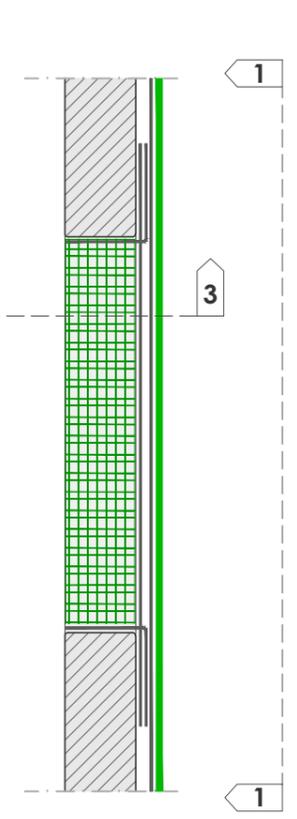


VISTA DAL BASSO VERSO L'ALTO  
V3-V3

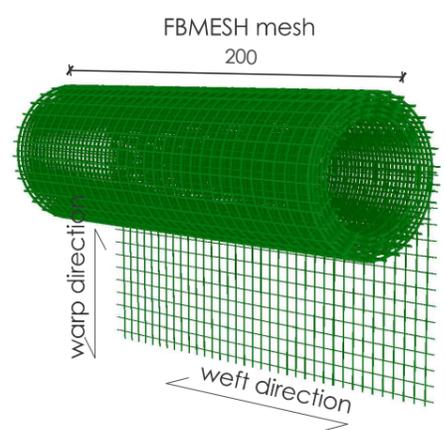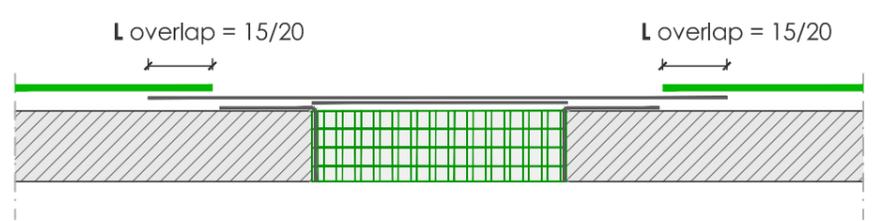


PHASE 4 - Drilling hole tracing

(scale 1:25)


FRONT VIEW  
V1-V1

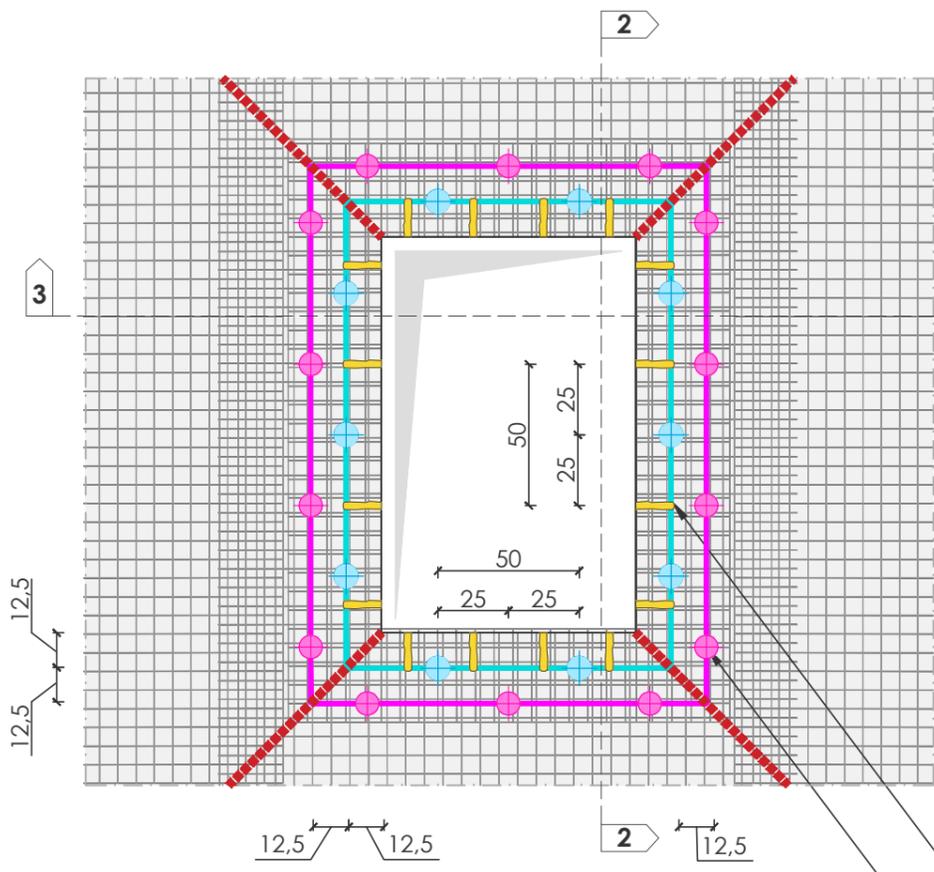

SIDE VIEW  
V2-V2

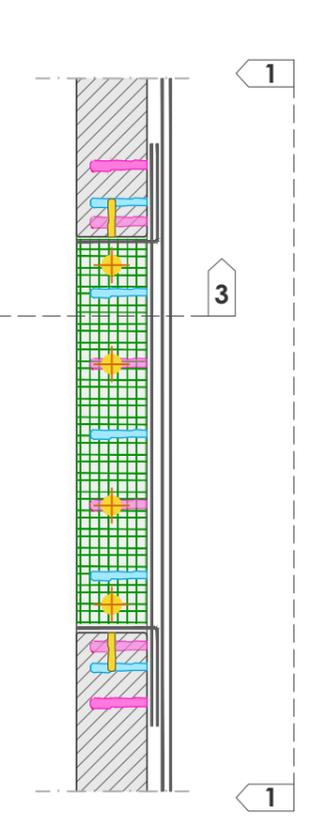

VIEW BOTTOM - UP  
V3-V3

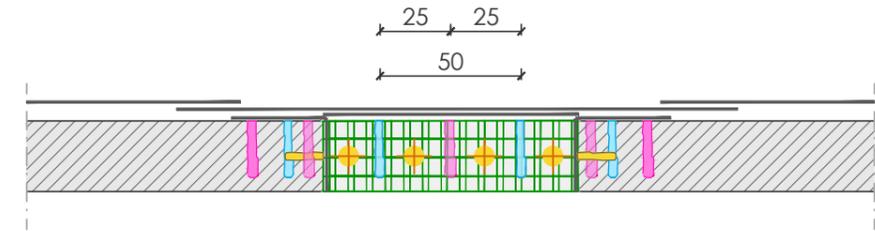

Trace of the 1° row of connectors (blue) with pitch  $p \leq 50$ cm  
Trace of the 2° row of connectors (magenta) with pitch  $p \leq 50$ cm

**NOTE:** Avoid drilling holes at the locations of the crack directions.

**PHASE 3:** Installation on the middle plane of the plaster of **FB MESH** mesh in all remaining areas of the wall, overlapping for a distance of 15-20cm corresponding to the mesh previously laid in **PHASE 2** on all openings.

**PHASE 4:** Tracing of holes for the installation of connectors and subsequent creation of the same. The holes will be placed around the perimeter of the opening according to two tracks positioned respectively at a distance of 12.5cm and 25cm from the corners of the opening. The connectors will have a pitch of 50cm along the development of the tracks, and the arrangement should be staggered between the two. Similarly, the holes for the connectors will also need to be made on shoulders, lintels, and architraves, and will be placed in line with the wall.

Measurements are expressed in centimeters unless otherwise specified.  
For the installation diagram of connectors and materials table, please refer to table CRM10.

