
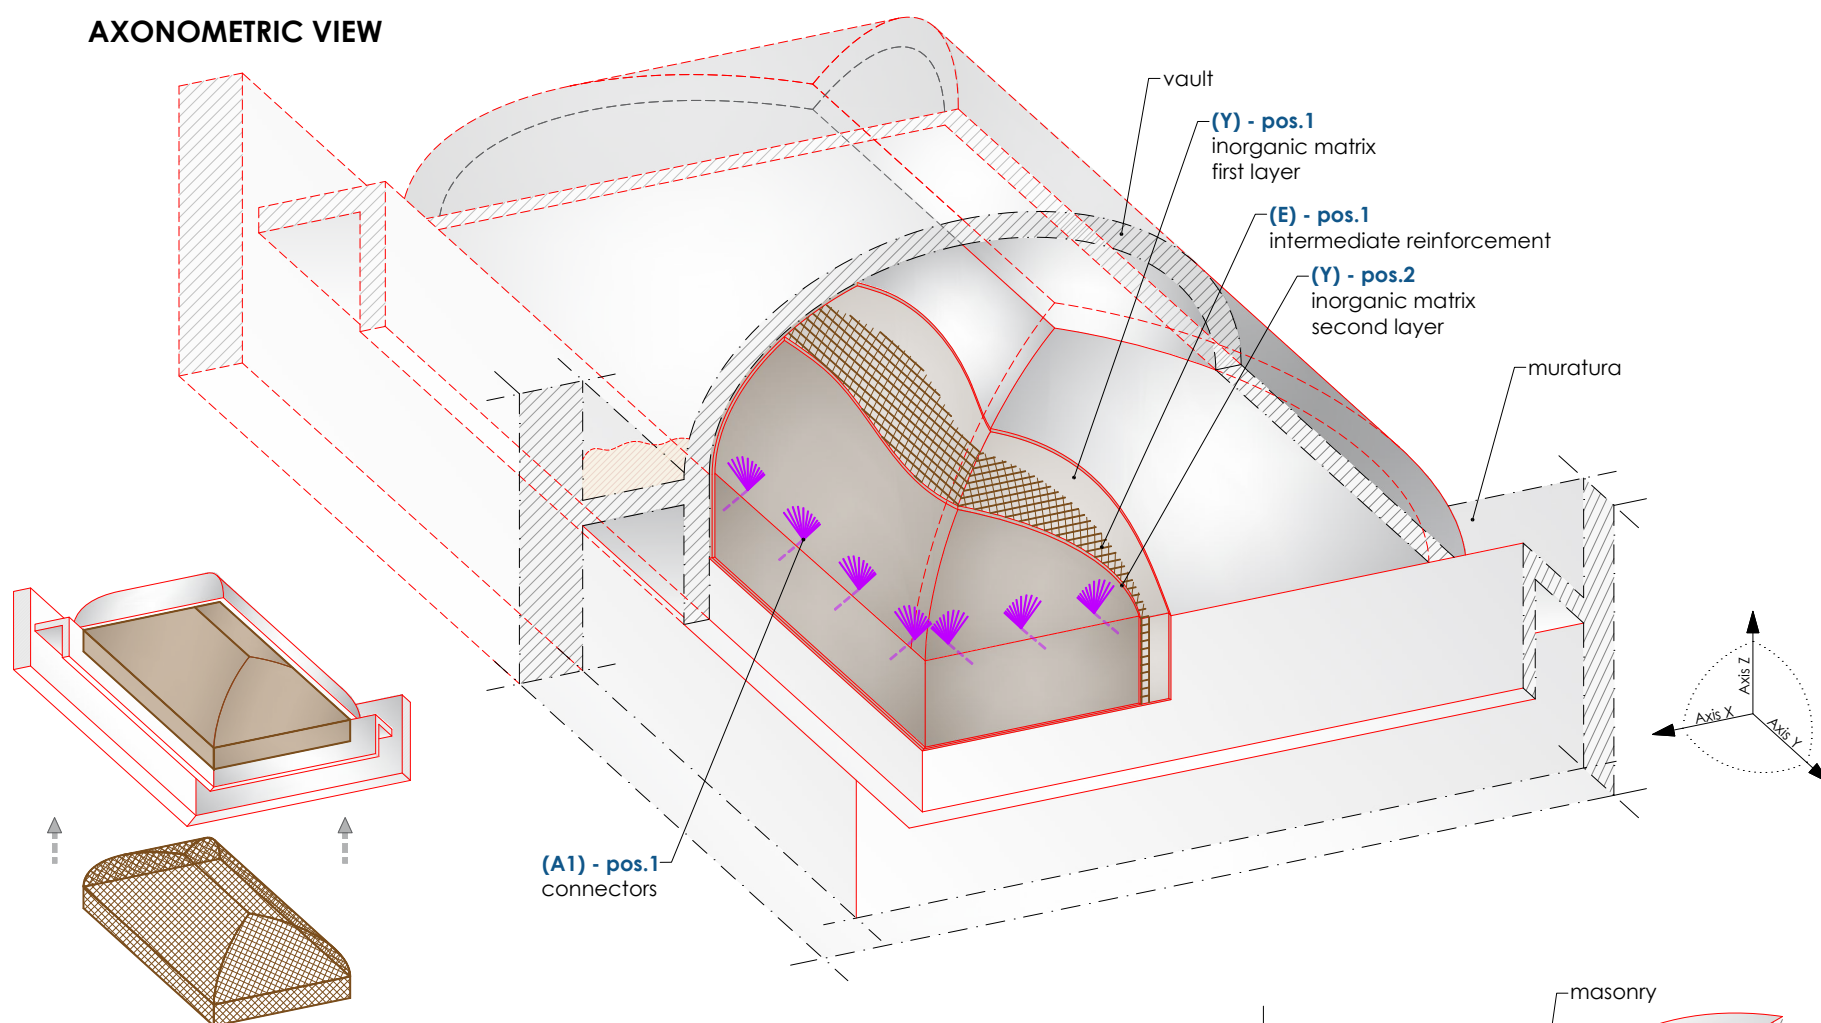
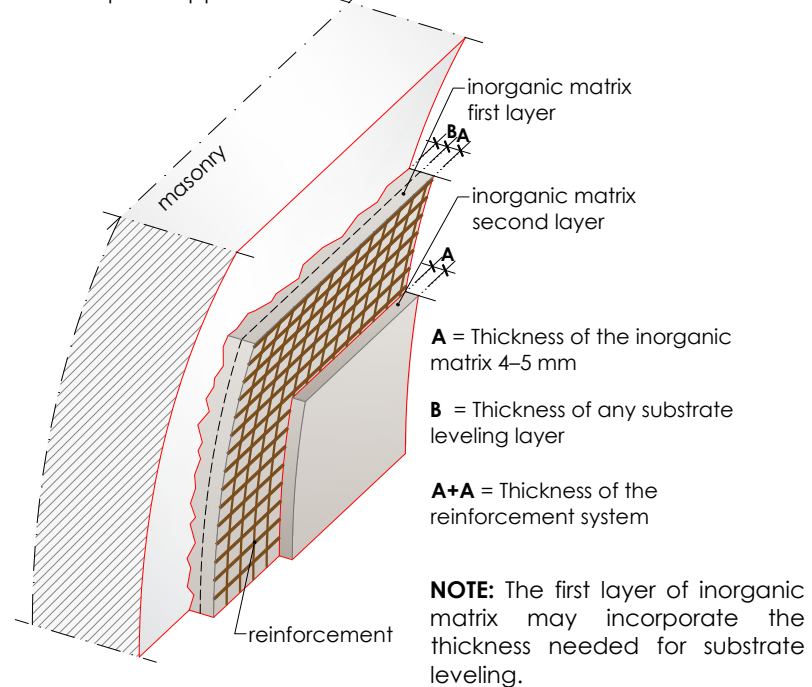
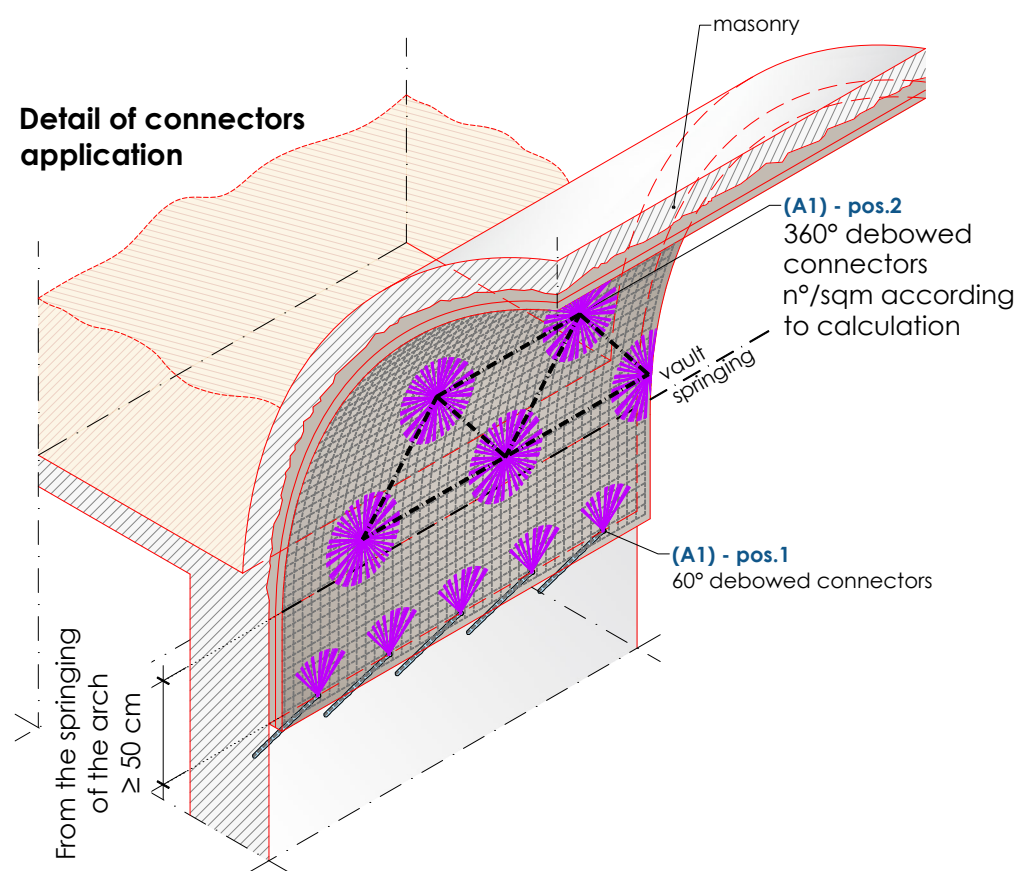


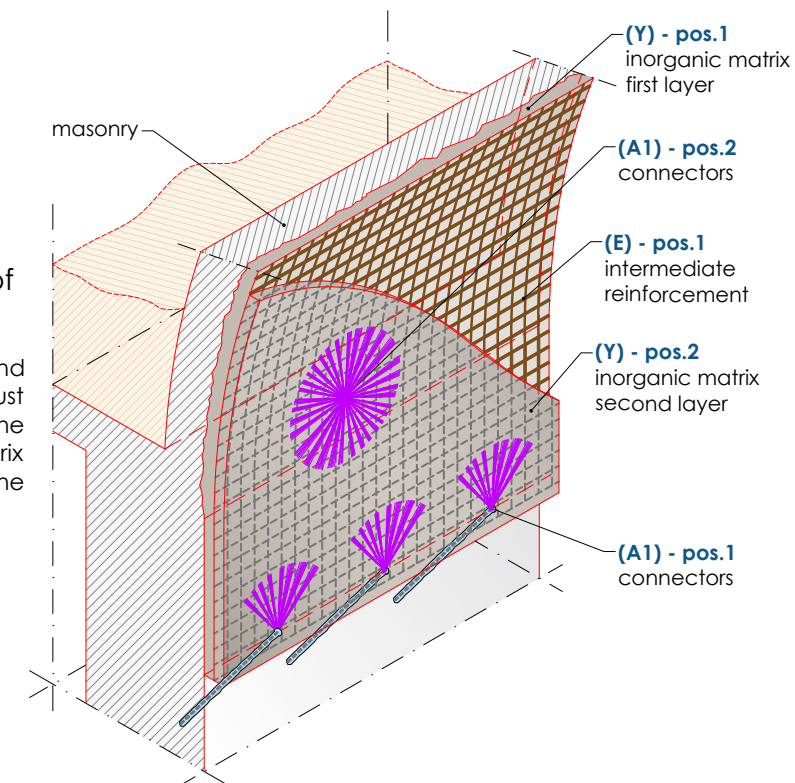


## AXONOMETRIC VIEW

STRATIGRAPHIC DETAIL  
complete applicationDetail of connectors  
applicationDetail SOLUTION "A" -  
Debowed connectors  
above the second layer of  
inorganic matrix

The layout, bonding, and debowing of the connectors must be carried out only after the second layer of inorganic matrix has been applied, once the mortar has fully hardened.

Detail SOLUTION "B" -  
Debowed connectors  
above the reinforcement

The layout and bonding of the connectors must be carried out after PHASE 0 (substrate preparation), while the debowing is performed only after the reinforcement has been installed..

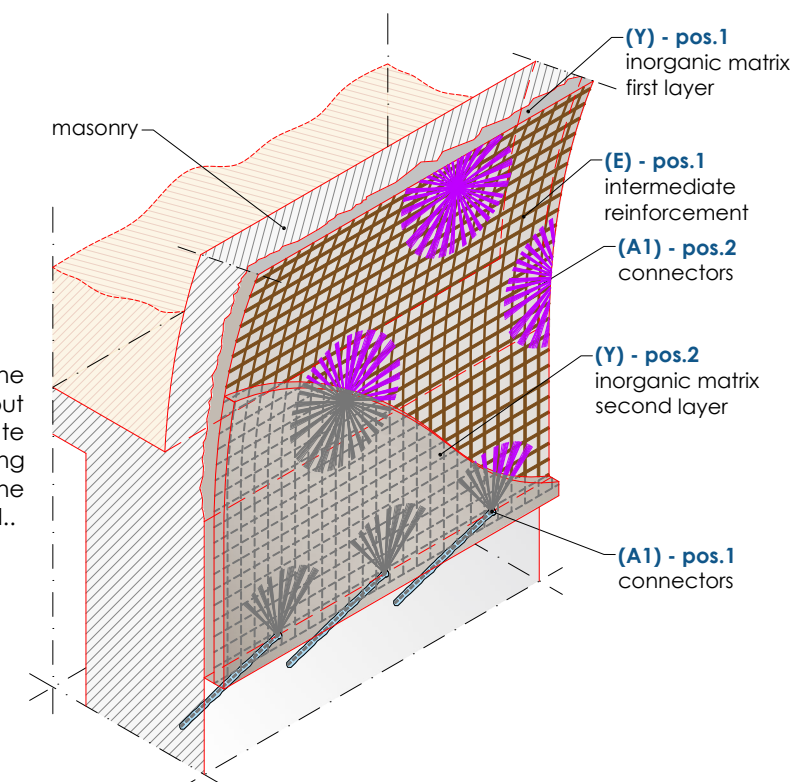

## MATERIAL IDENTIFICATION - C-MATRIX system

(Y) INORGANIC MATRIX

(E) REINFORCEMENT

(A1) FB-TUP10-....(bowed connectors)

(P3) FB-....INTEGRA FIXA-.... (anchoring resin)

Dimensions are expressed in mm unless otherwise specified  
For the materials table, refer to table FRM 08