



ISOMETRIC VIEWS MASON'S HAMMER

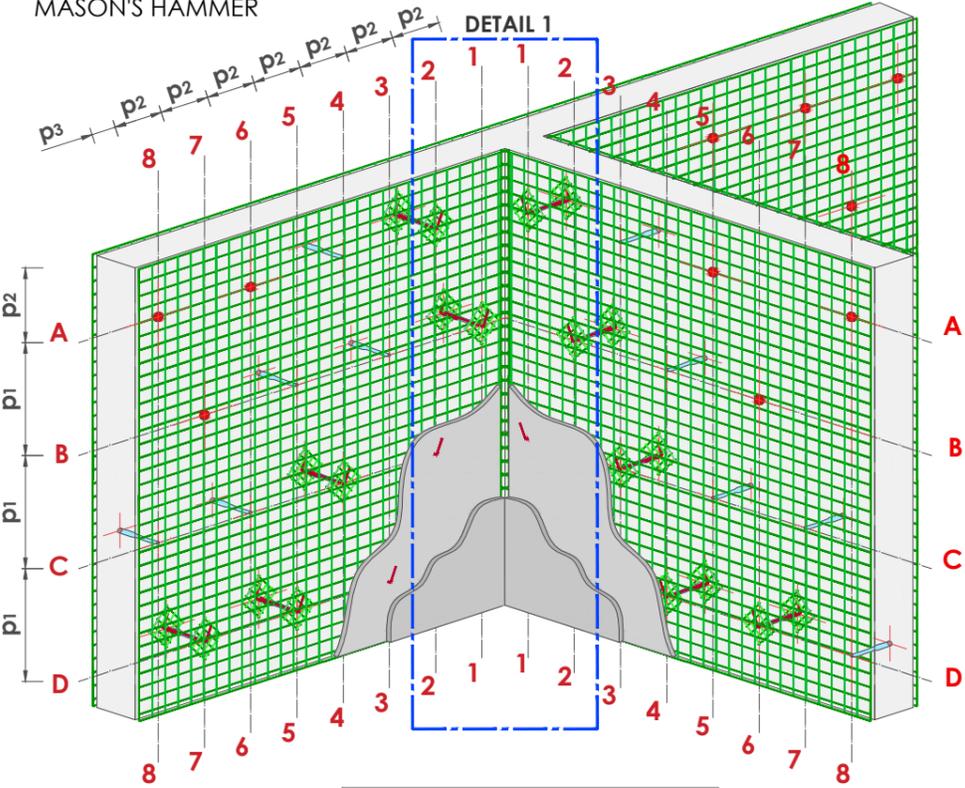


Standard spacing	Spacing [cm]
p ₁	50
p ₂	25
p ₃	12,5


CORNER CONNECTION

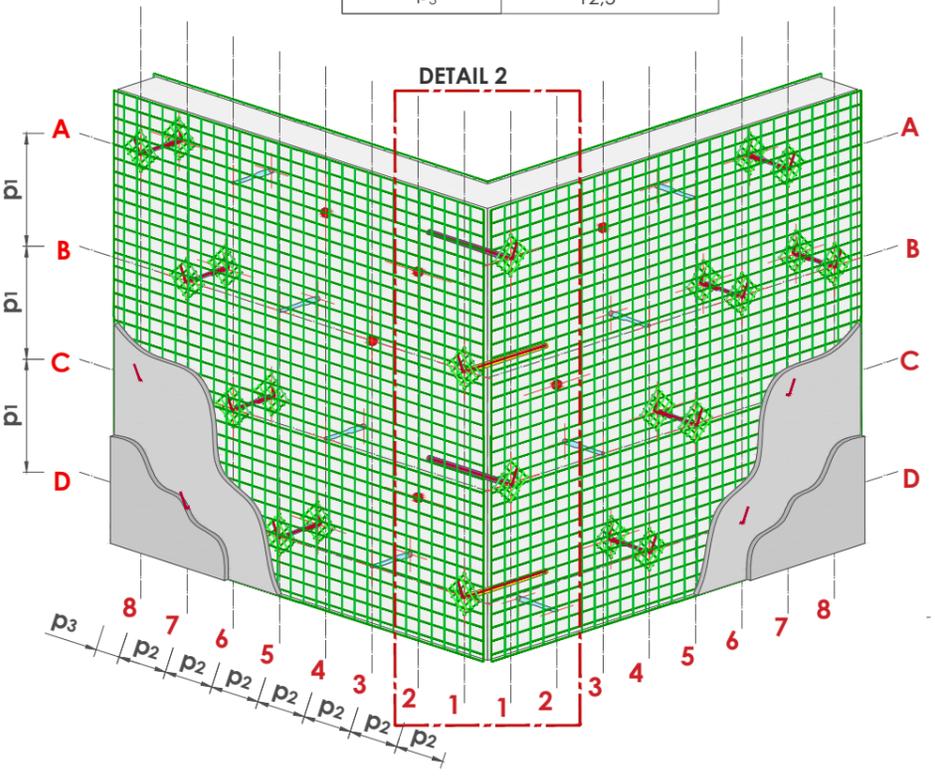

DETAIL 1

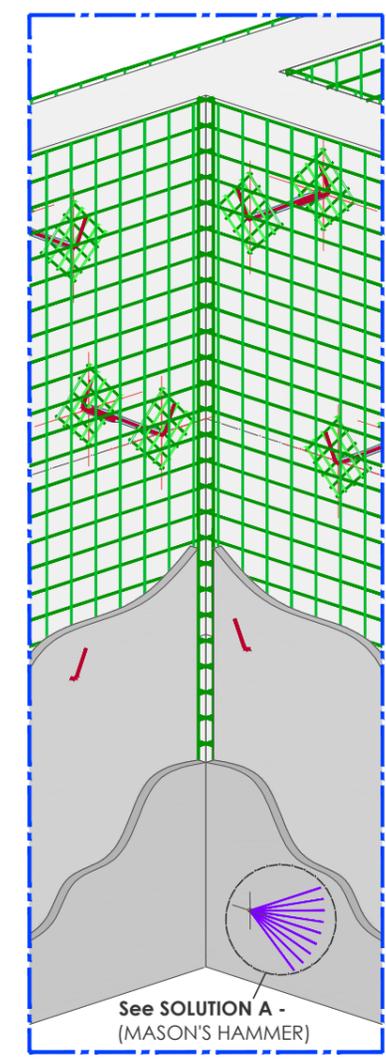


DETAIL 2

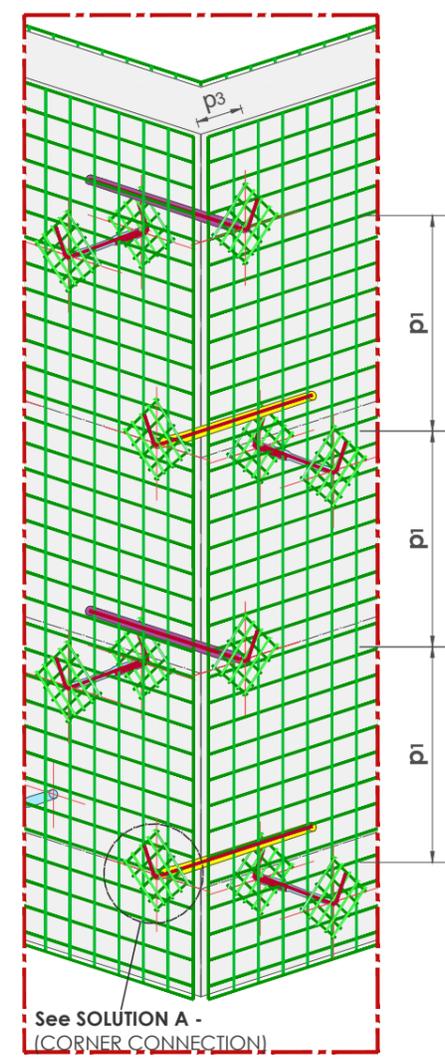


DETAIL OF MASON'S MALE CONNECTIONS - scale 1:10

Solution A - Connection with protruding GFRP bars

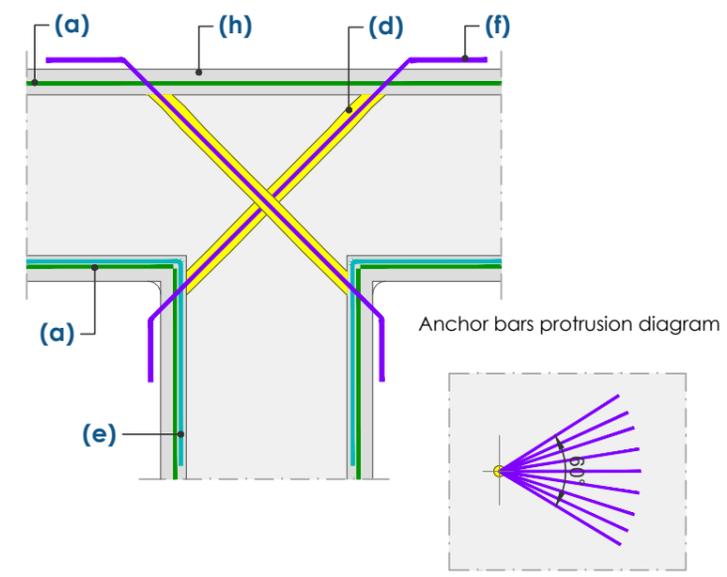


Solution B - Connection with stainless steel bars

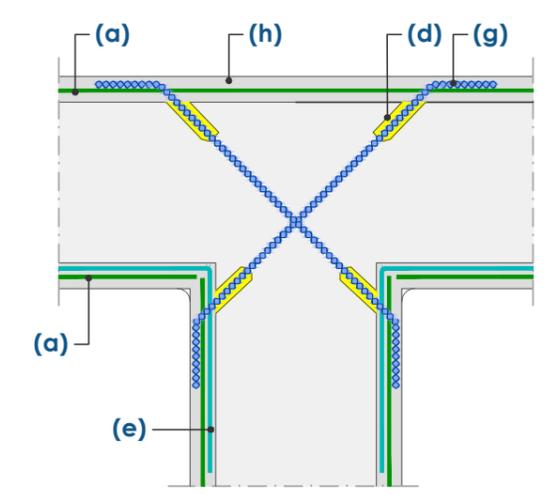


DETAIL OF MASON'S MALE CONNECTIONS - scale 1:10

Solution A
Connection with GFRP bars

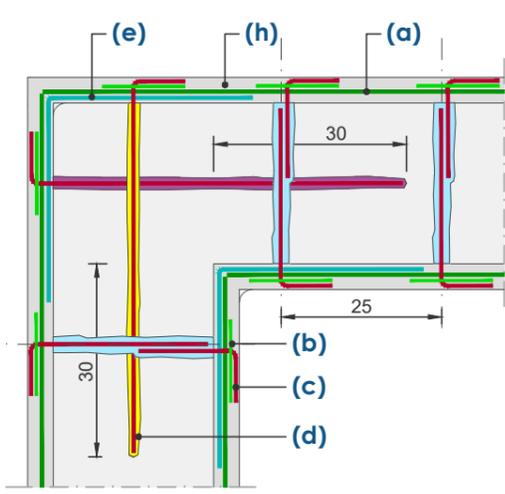

Solution B
Connection with stainless steel bars

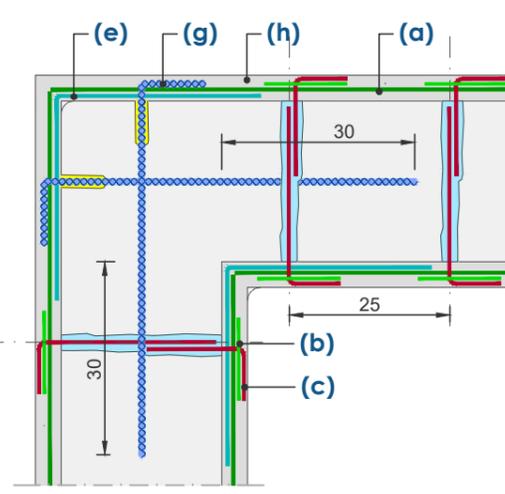

IDENTIFICATION OF CRM MATERIALS

- (a) **FBMESH** (Preformed GFRP mesh)
- (b) **FBFAZ33X33T96AR** (Preformed GFRP distribution pad)
- (c) **FBCONL** (GFRP "L" shaped connector)
- (d) **INTEGRA FIXA VINYL 15** (two-component chemical anchor)
- (e) **FBANG** (Preformed GFRP right-angle element)
- (f) **FB-TUP10-VAR1A/2A** (Fiber-reinforced composite material bar)
- (g) **FB-HBAR10** (Austenitic stainless steel helical bar)
- (h) **MALTA MATERIA/EPOCA** (Pre-mixed eco-compatible lime-based mortar)

Measurements are expressed in cm unless otherwise specified.
For the connector layout diagram and materials table, please refer to table CRM10.