

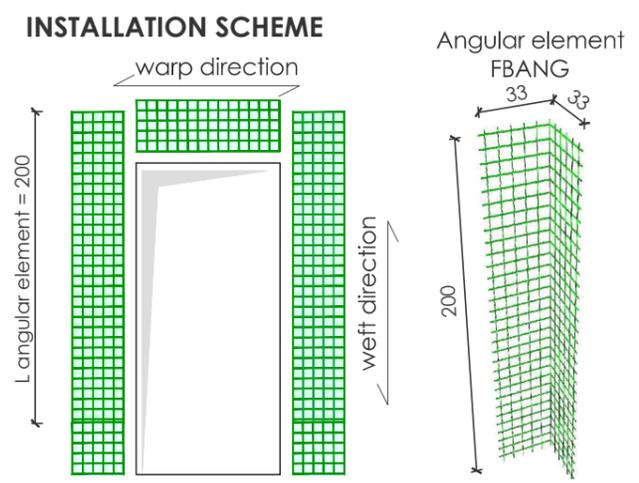
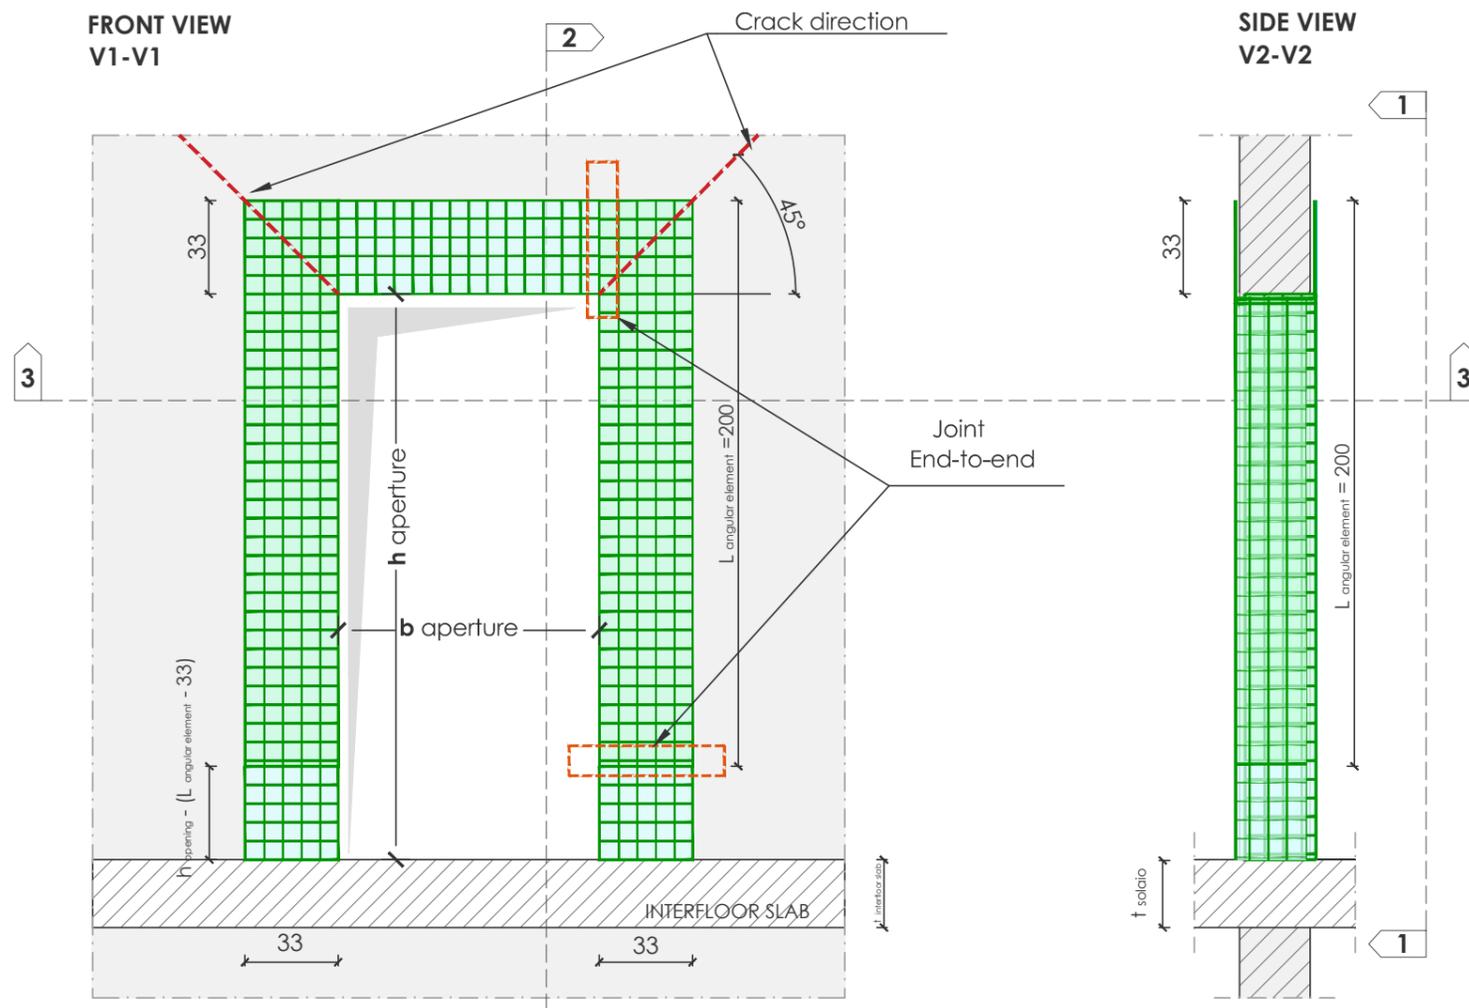


### PHASE 1 - Placement of the FBANG angular element (scale 1:25)

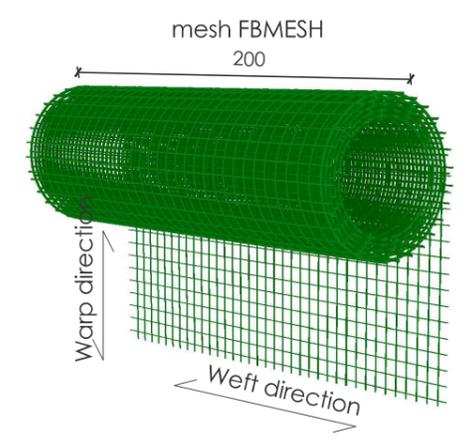

### PHASE 2 - Placement of the FBMESH mesh (scale 1:25)

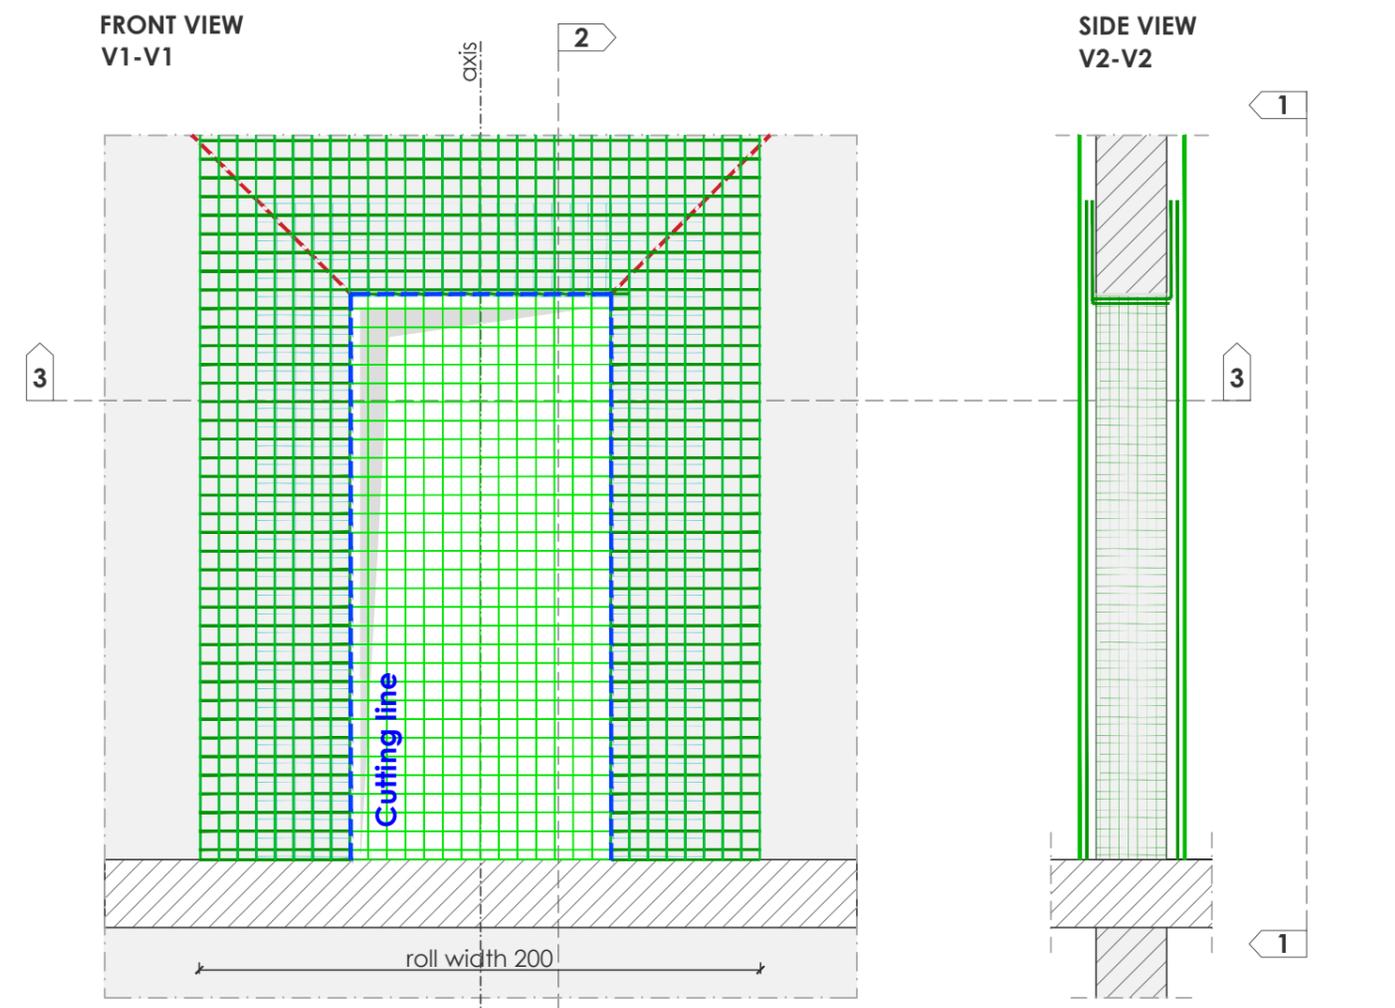

**PHASE 1:** Placement of **FBANG** angular elements on the median plane of the plaster around the perimeter of the reinforced opening on both sides of the wall.  
At the shoulders - shaping and cutting of excess parts to allow one of the two sides to be placed internally within the opening; extension of at least 33cm on both ends of the shoulder side of the corner

**PHASE 2:** Placement of **FBMESH** mesh on the median plane of the plaster starting from the opening. Lay the mesh across the entire width of the 200 cm roll and cut it at the opening. Avoid overlapping within approximately 1m from the axis of the door/window at this stage.

Measurements are expressed in cm unless otherwise specified.  
For the connector layout diagram and materials table, please refer to table CRM10.