


PHASE 5 - FBFAZ33x33T96AR, FBCON, MORTAR MATERIA/EPOCA


(scale 1:20)

FRONT VIEW  
V1-V1

SIDE VIEW  
V2-V2

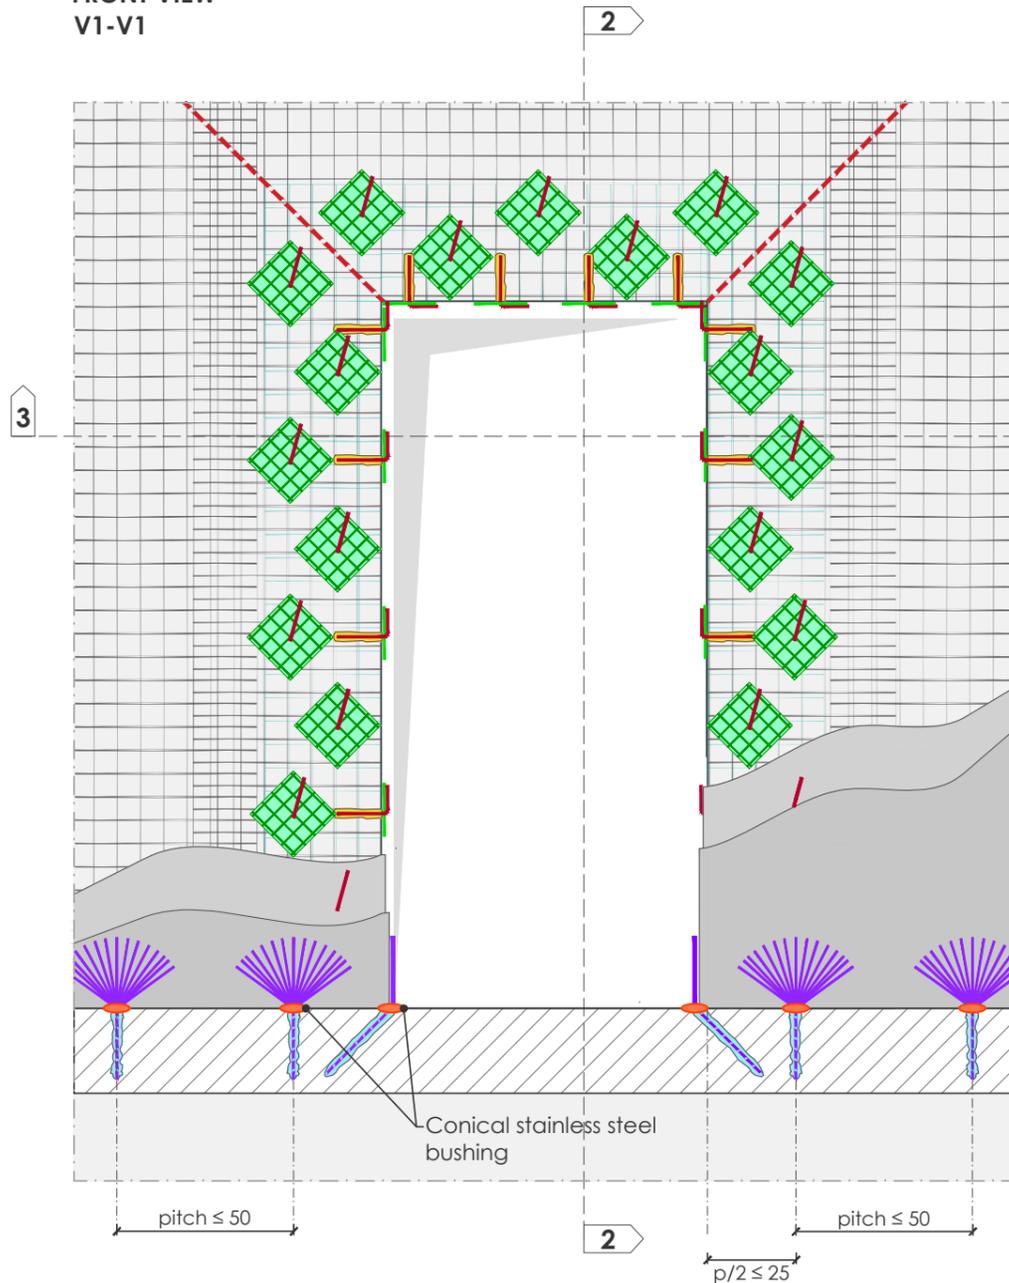

VIEW FROM BOTTOM TO TOP  
V3-V3

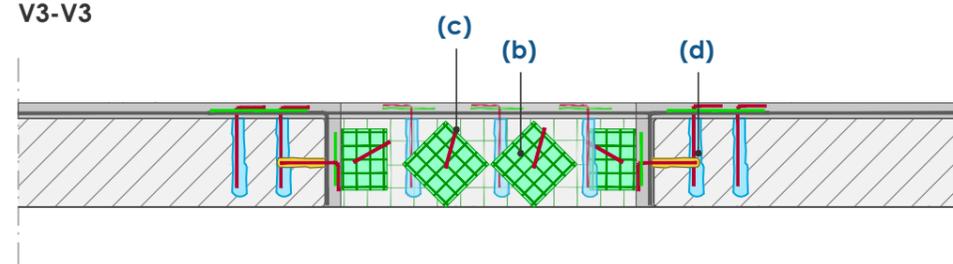


**PHASE 5:** Filling the holes with **FIXA VINYL 15** resin and insertion of **FBCON** connectors with their corresponding GFRP distribution pads **FBFAZ33x33T96AR**. Application of **MATERIA/EPOCA** mortar with a thickness of 3cm and installation of **FB-TUP10-VAR1A** GFRP connectors on hardened plaster.

VARIANT IN THE PRESENCE OF STEEL LINTEL


(scale 1:25)

FRONT VIEW  
V1-V1


SIDE VIEW  
V2-V2

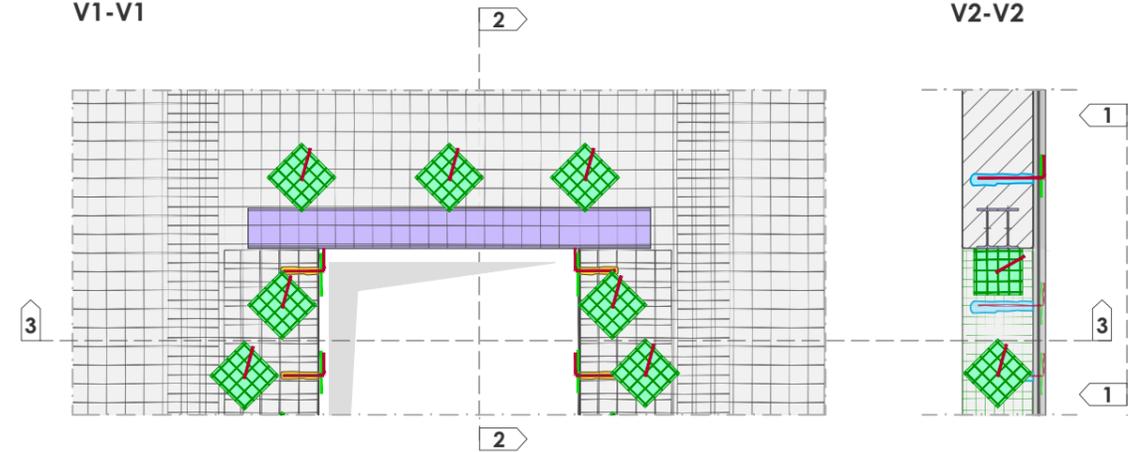

VIEW BOTTOM-UP  
V3-V3

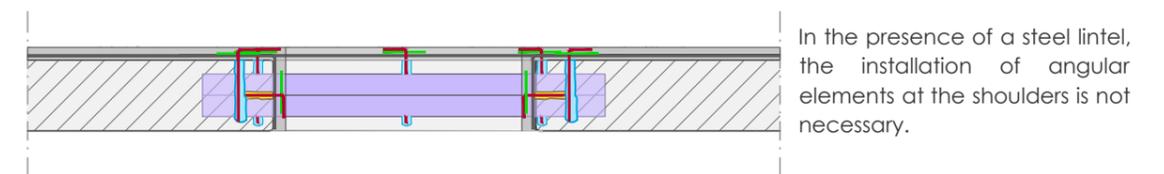

Isometric view - Detail of PHASE 1 and PHASE 5

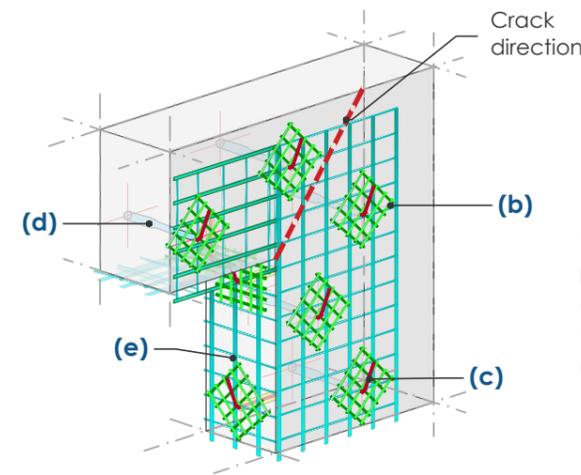

NOTES:

1. Avoid drilling holes at the locations of the crack directions;
2. It is possible to carry out the intervention according to a technological alternative that involves executing the same work phases but disregarding the initial installation of the angular elements provided in **PHASE 1**. The procedures and requirements of the remaining phases remain unchanged.

IDENTIFICATION OF CRM MATERIALS

- (a) **FBMESH** (Preformed GFRP mesh)
- (b) **FBFAZ33x33T96AR** (Preformed GFRP distribution pad)
- (c) **FBCONL** (Preformed GFRP "L" shaped connector)
- (d) **INTEGRA FIXA VINYL 15** (Two-component chemical anchor)
- (e) **FBANG** (Preformed GFRP right angle element)
- (f) **FB-TUP10-VAR1A/2A** (Fiber-reinforced composite bar)
- (g) **FB-HBAR10** (Austenitic stainless steel helical bar)
- (h) **MORTAR MATERIA/EPOCA** (Pre-mixed eco-friendly lime-based mortar)

Measurements are expressed in centimeters unless otherwise specified.  
For the installation diagram of connectors and materials table, please refer to table CRM10.

