



PHASE 1 - Installation of FBANG angular element (scale 1:25)

FRONT VIEW
V1-V1

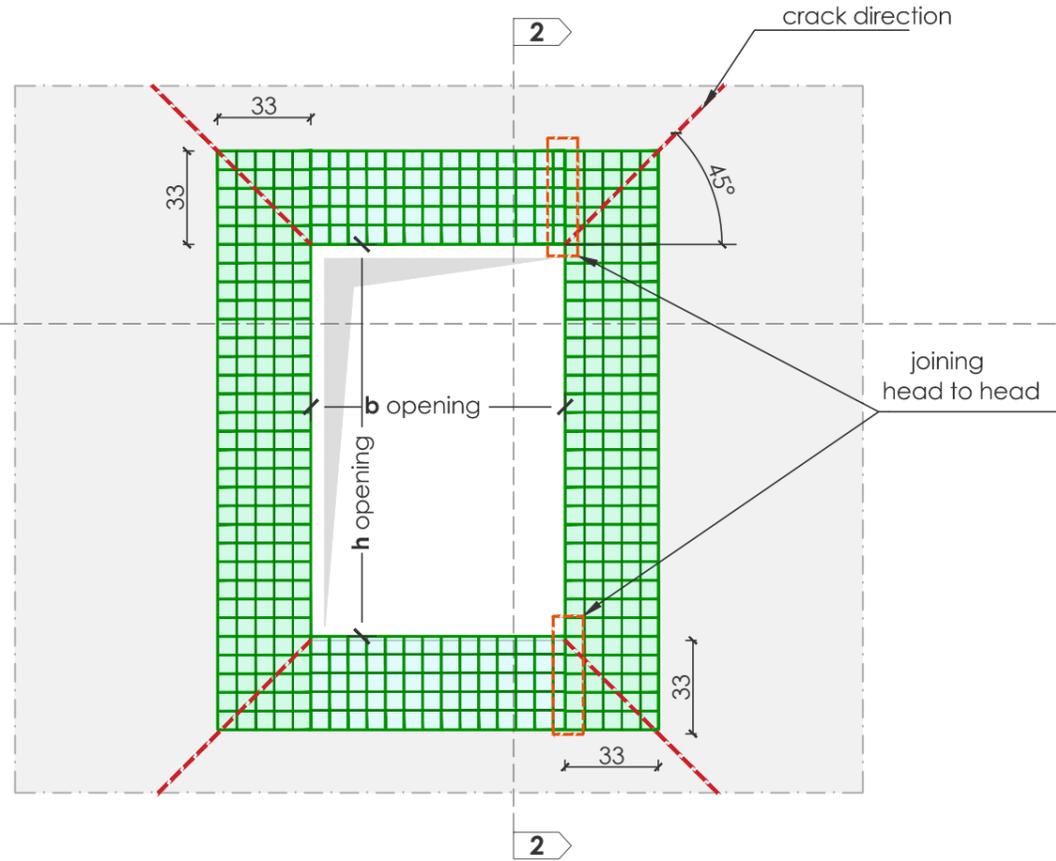


SIDE VIEW
V2-V2

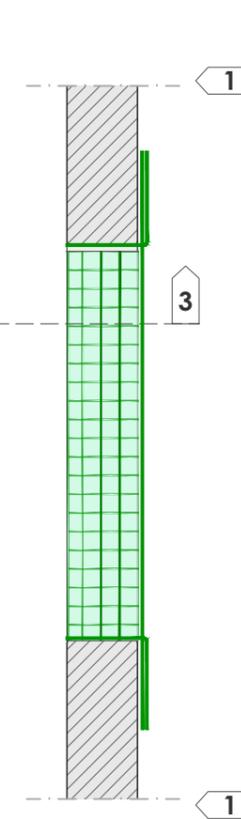


PHASE 2 - installation of the FBMESH mesh (scale 1:25)


FRONT VIEW
V1-V1

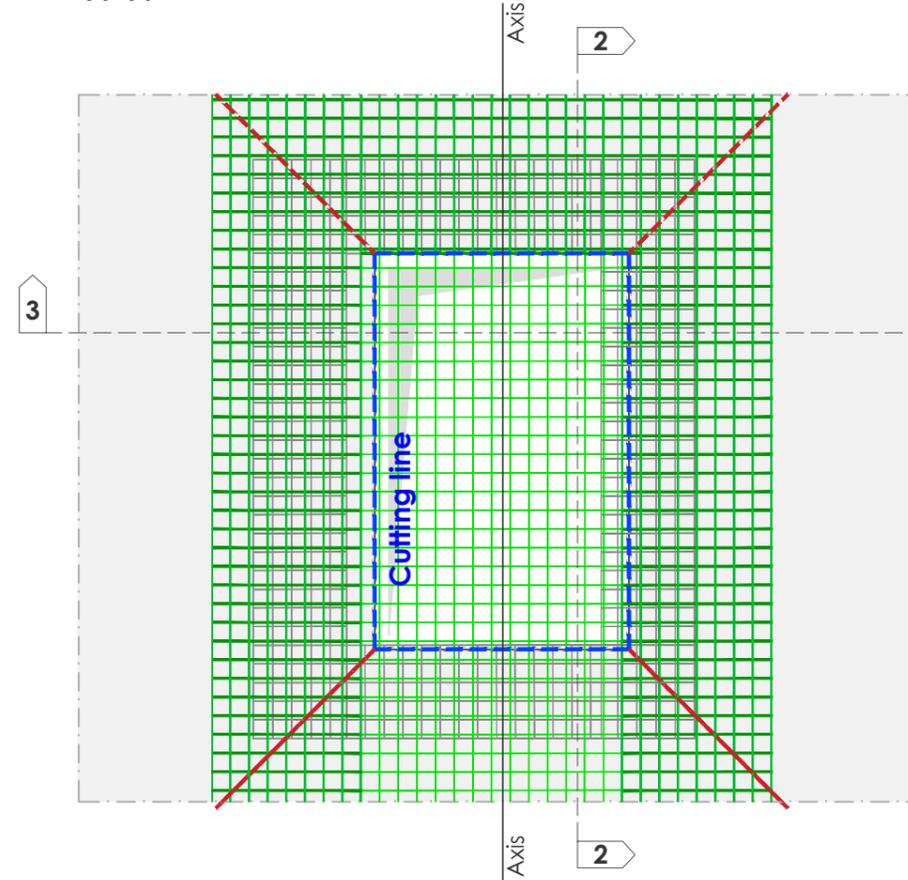


SIDE VIEW
V2-V2

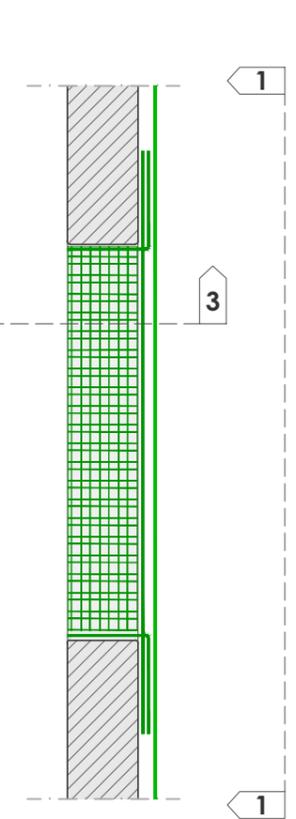



INSTALLATION DIAGRAM

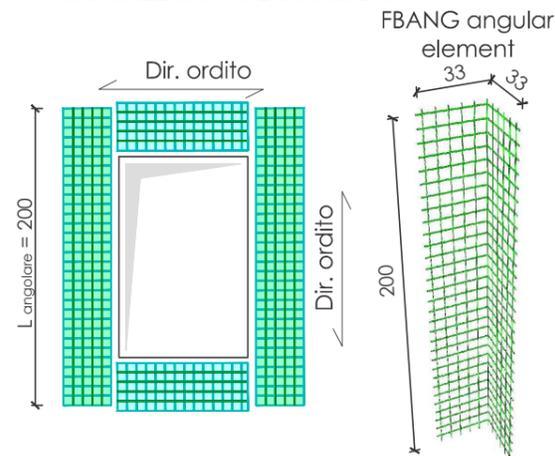

VIEW BOTTOM-UP
V3-V3

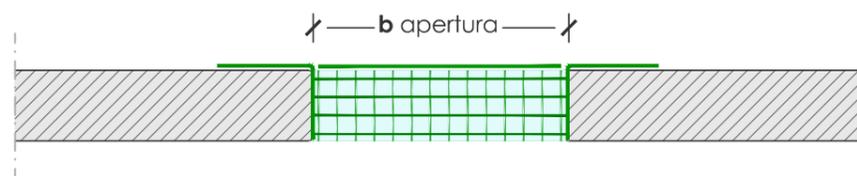

VIEW BOTTOM-UP
V3-V3

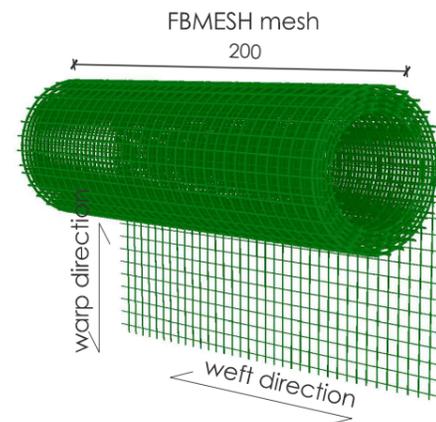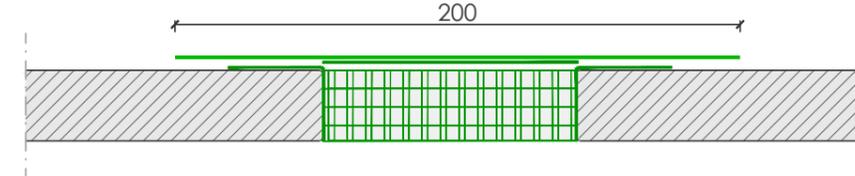

FASE 1: Placement on the middle plane of the plaster of angular elements **FBANG** around the perimeter of the opening subject to reinforcement on both sides of the wall. At the shoulders - shaping and cutting of the excess parts to allow placement with one of the two sides inside the opening. Install with an extension of 33cm on both ends of the shoulder-side corner.

PHASE 2: Installation on the middle plane of the plaster of FBMESH mesh to be carried out starting from the opening. Lay the mesh across the full width of the roll, which is 2m, and make the cut corresponding to the opening. Avoid overlaps within about 1 meter from the axis of the window during this phase.

Measurements are expressed in centimeters unless otherwise specified.
For the installation diagram of connectors and materials table, please refer to table CRM10.

