






LAYING SCHEME OF CONNECTORS N.4/m<sup>2</sup>  
Scale 1:25

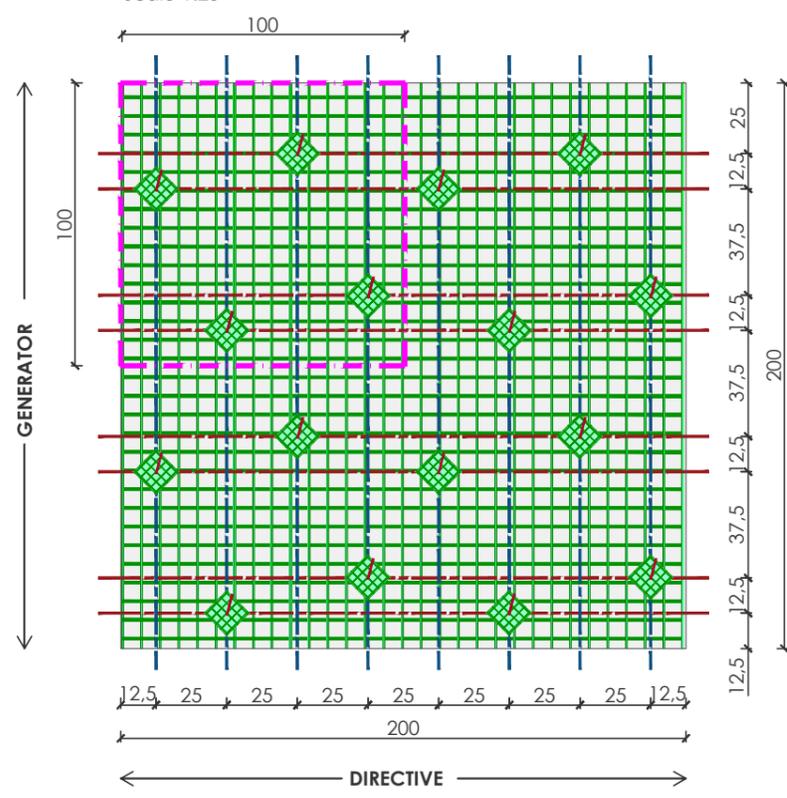

LAYING SCHEME OF CONNECTORS N.8/m<sup>2</sup>  
Scale 1:25

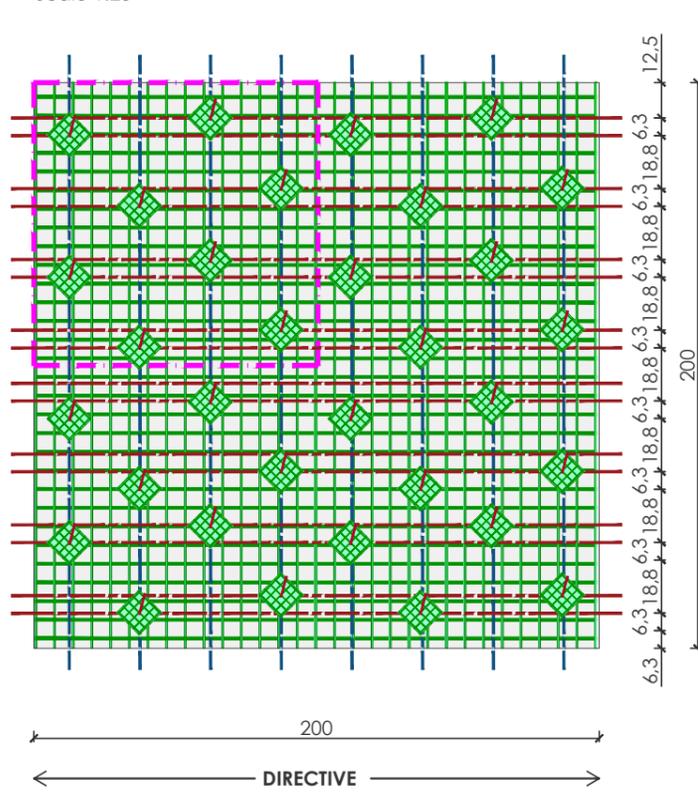

LAYING SCHEME OF CONNECTORS N.6/m<sup>2</sup>  
Scale 1:25

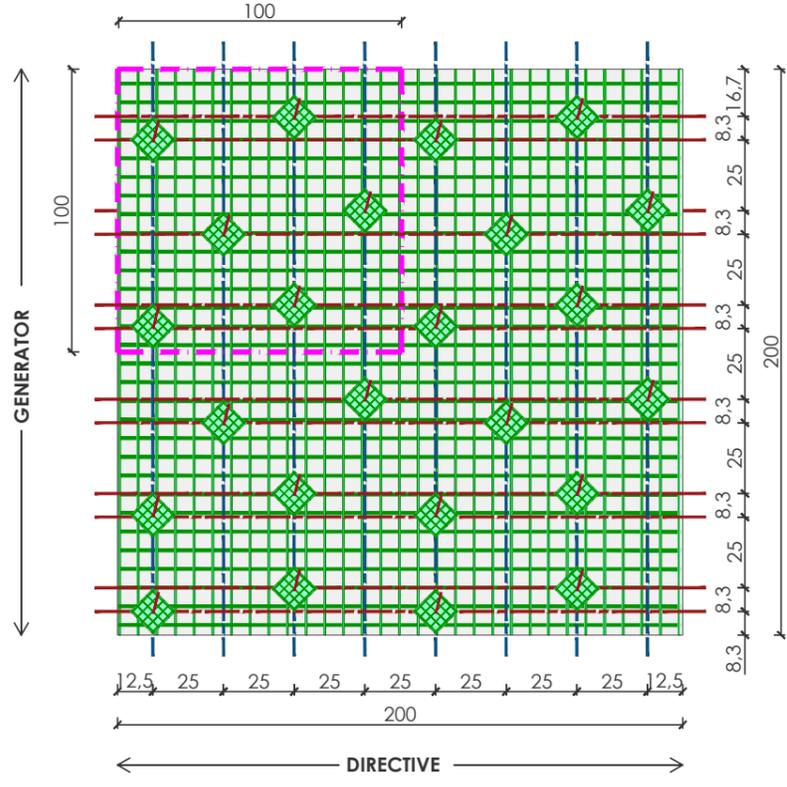

MATERIALS TABLE			
IDENTIFICATION	MECHANICAL CHARACTERISTICS		QUALIFICATION
	MODULE/MATERIAL	STRENGTH	
<b>(a) FBMesh66X66T96AR</b> <small>(Preformed GFRP mesh) NOTE: The details remain valid for the other meshes</small>	25 GPa	64.5 kN/m	CE
<b>(b) FBFAZ33X33T96AR</b> <small>(Preformed GFRP mesh distribution pad)</small>	25 GPa	365 MPa	CE
<b>(c) FBConL</b> <small>((Preformed GFRP "L" shaped connector))</small>	26.5 GPa	380 MPa	CE
<b>(d) INTEGRA FIXA VINYL 15</b> <small>(Two-component chemical anchor)</small>	C16/20 ÷ C50/60 Bars Ø8÷Ø32	1.60÷4.30 MPa	CE C2
<b>(e) FBANG66X66T96AR</b> <small>(Preformed right-angled GFRP element)</small>	25 GPa	87 kN/m	CE
<b>(f) FB-TUP10-VAR1A/2A</b> <small>(Bar made of fiber-reinforced composite material)</small>	68.5 GPa	560 MPa	CE
<b>(g) FB-HBAR10</b> <small>(Helical bar in austenitic stainless steel)</small>	169 GPa	1146 MPa	CE
<b>(h) MORTAR LINE MATERIA/EPOCA</b> <small>(Pre-mixed eco-friendly mixture based on lime)</small>	≤ 10 GPa	≥ 15 MPa	CE
<b>(i) FBDPP</b> <small>(Steel connector)</small>	-	-	CE
<b>(l) FBKIT-BAR8X300INOX</b> <small>(Through-threaded connectors in stainless steel AISI 304)</small>	189.4 GPa	1084 MPa	CE
<b>(m) FBKIT-NYLON_INOX</b> <small>(Stainless steel connection kit - Ø6x30)</small>	-	-	CE

Measurements are expressed in centimeters unless otherwise specified.

